

EMERGENCY LIGHTING AND ORIENTATION SYSTEMS





SFS EMERGENCY GUIDANCE FIXTURE

- Aluminum profile body, ABS plastic covers
- Recessed mounting part optional
- Economic exit marking
- Transparent acrylic light panel

- It is designed for economic markings that can be used in ceiling wall and door applications.
- All plastic equipments provide necessary flame-proof conditions.
- 5mm transparent acrylic diffuser.
- Light source LEDs radiate through the profile, through the diffuser, illuminate the figure on it.
- is an independent emergency exit orientation luminaire located within the battery and power supply..
- Continuous charging method keeps the battery pack full and ready.
- The mains supply voltage is standard 220 volts AC 50 Hz.
- Charging time for first use is 24 hours.
- It can withstand fluctuations up to 285 volts at mains voltage.
- Switches to emergency lighting mode under 150 volts, charging over 185 volts.
- It is manufactured according to TS 8710 EN60598-2-22 standard in the framework of ISO 9001-2000 quality management system.

USAGE AREAS

- Fire exit doors
- Offices
- Meeting rooms
- Reception areas
- Shopping malls
- Hotels and bars
- Restaurants
- Clubs
- Universities, Student dormitories, Schools and colleges

LAMP OPTIONS

- White light LED bulb, 6500°K

BODY STRUCTURE

- Aluminum profile body, ABS plastic side covers
- Hinged mounting part - ABS plastic, suitable for fixing to the ceiling or wall
- Label panel - transparent acrylic panel white latex foil via printing application
- BATTERY - Nickel-cadmium in all models

OPTIONS



- Continuous and emergency models.
- 1-3 hour emergency backup times.
- Optional flush mounting apparatus - Electrostatic powder white painted hair, easy assembly with spring.





SFS EMERGENCY GUIDANCE FIXTURE

MODEL CODE	LIGHTING STYLE	MOUNTING STYLE	LAMP	LIGHT FACE	DURATION (minute)	DIMENSIONS (W-L-H)mm	WEIGHT	IP CLASS	ISOLATION CLASS	OPERATION TEMP	POWER CONSUMPTION	OPERATING VOLTAGE
SFS-24	Constant Light	Ceiling-Wall	6xF LED	Double Side	Emergency 180 m	38x240x169mm	0,450kg	40	I	-16/+45°	1,5w	220-240
SFS-30	Constant Light	Ceiling-Wall	6xF LED	Double Side	Emergency 180 m	38x300x201mm	0,550kg	40	I	-16/+45°	1,5w	220-240

DIMENSIONS

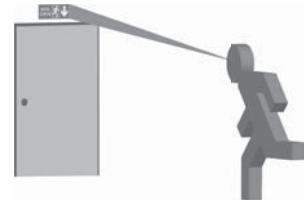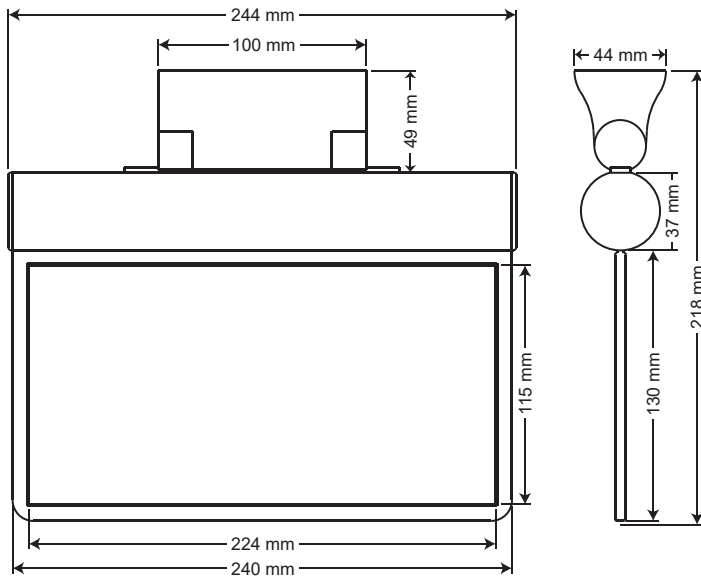

24 cm model
visible distance
22 meter

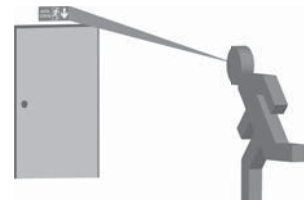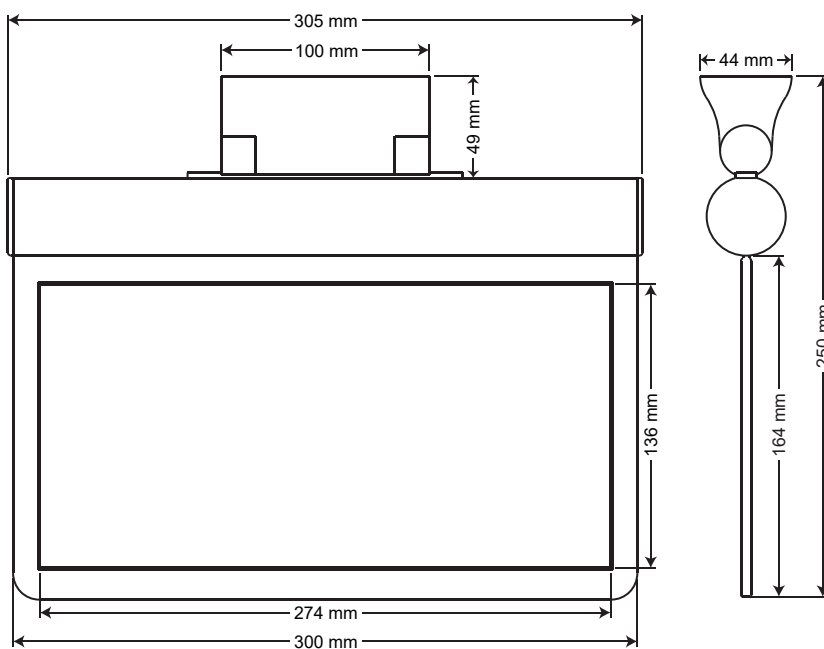

30 cm model
visible distance
28 meter